

**OPEN SET**  
OIL COOLED

**SERIES** **GSL**<sub>22D-42D</sub>

**GSL22D-42D:**  
**An alternative power supply**

Reliable, excellent performers and easily installed, this series is perfect for use in any location not connected to a main power supply.



**Reliability**

Engine and alternator ensure a constant, high quality power supply for the most demanding applications.

**Easier to use**

New design gives easy access for maintenance and repair work.

**Large autonomy**

Extended fuel capacity means continuous performance.

**Security**

Gensets are safeguarded against unauthorised use and minimise the potential of accidental damage.


MODEL		GSL22D	GSL30D	GSL42D
PRIME POWER	kVA/kWe	20,0/16,0	29,0/23,2	39,3/31,4
EMERGENCY POWER	kVA/kWe	21,1/16,8	30,0/24,0	41,2/33,0
ENGINE		F3M 2011	F4M 2011	BF4M 2011
AUTONOMY (75% LOAD)	h	23,1	16,9	13,2
FUEL TANK CAPAC.	l	90	90	90
DIMENSIONS (LxWxH)	mm	1400x750x1700	1800x750x1720	1800x750x1720
WEIGHT	kg	554	714	761

PRIME POWER (PRP) (ISO 3046) RATING: PERMISSIBLE POWER OUTPUT WITH NO TIME LIMITATION, PLUS 5% EXTRA POWER FOR GOVERNING PURPOSES

EMERGENCY POWER (LTP) (ISO 3046) RATING: MAXIMUM POWER WHICH CAN BE DELIVERED FOR UP TO 500 HOURS PER YEAR OF WHICH A MAXIMUM OF 300 HOURS IS CONTINUOUS RUNNING

ALL MODELS COMPLY WITH TA LUFT-4000 REGULATION

**OPEN SET**  
OIL COOLED

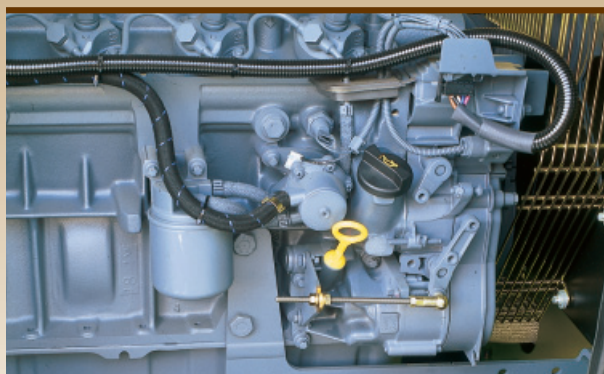

### Economic

- Engines with long maintenance intervals and low fuel consumption (TÜV).
- The brushless construction of the generator assures a long service life.

### Large autonomy

- High capacity fuel tank for longer work without fuel refilling (TÜV).



### Safety

- All metal parts are connected to an external grounding point. Fault currents are connected to the ground for your safety.
- Visible and accessible emergency shutdown switch (TÜV) protects against incorrect use of the generator.



### Reliability

- In oil cooled engines, the single fluid for both cooling and lubrication avoids corrosion and cavitation.
- Deutz engines extremely high load acceptance capacity ensures instant electricity supply.
- They respond quickly to load fluctuations. In addition, the application will not suffer from frequency deviations.
- Highly efficient alternators.
- Constant supply guaranteed by the electronic voltage regulator under any generator operating condition.
- Anti-vibration isolators (TÜV) ensure vibration free operation.



### Facility of use

- High efficiency air filter (TÜV) with easy removable cartridge.
- A large number of options available for any kind of special application.
- Generating sets are delivered ready to start and they require no special foundations, so that they can be installed anywhere.
- Easy access to the fuel filling cap which is mounted on the base frame.

### Security

- Hot parts protection against accidental contact.
- Moving and rotating parts protection against accidental contacts.
- The exhaust gas emissions meet the most restrictive regulations.
- The engine protection (stop solenoid) guarantees the shutdown of the machine when an engine failure occurs.
- Industrial silencer (TÜV) to reduce engine noise emissions.



The producer reserves the right to introduce changes to models and features without prior notice. Models, version and associated products characteristics can vary according to the markets.

### CERTIFICATION

Production sites according to ISO 9001 / ISO 14001 directions



### SERVICE

After sales service world wide.  
12 months warranty.  
All the gensets are completely tested before dispatch.