


| | GSA22D | GSA30D | GSA42D |
|---------|--------|--------|--------|
| A (mm) | 750 | 750 | 750 |
| B (mm) | 1700 | 1560 | 1710 |
| B1 (mm) | 1600 | 1460 | 1610 |
| C (mm) | 1400 | 1400 | 1800 |
| C1 (mm) | 1100 | 1100 | 1500 |
| D (mm) | 150 | 150 | 150 |
| E (mm) | --- | --- | --- |
| F (mm) | --- | --- | --- |
| G (mm) | 250 | 250 | 250 |
| H (mm) | 45 | 45 | 60 |

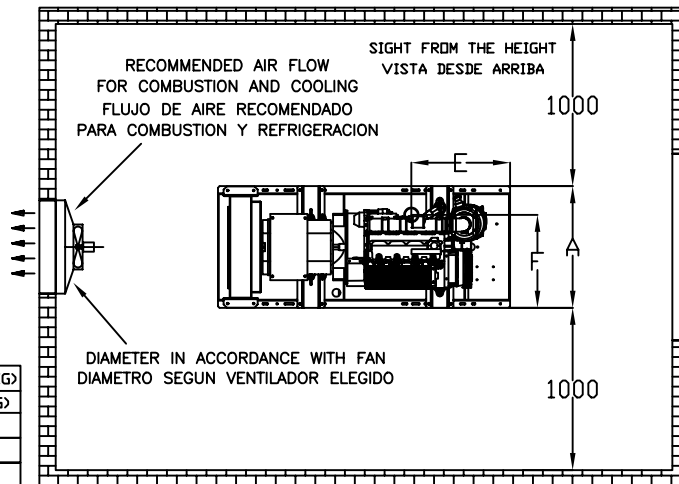


| MODEL/ MODELO | PRIME POWER/ POTENCIA | ENGINE/ MOTOR | ALTERNATOR/ ALTERNADOR | FUEL TANK (LIT.)/ DEPOSITO DE COMBUSTIBLE | WEIGHT (KG)/ PESO (KG) |
|---------------|-----------------------|---------------|------------------------|---|------------------------|
| GSA22D | 19.0 KVA | F3L 2011 | E1S13M/4 | 90 | 510 |
| GSA30D | 29.0 KVA | F4L 2011 | BCI 184F | 90 | 655 |
| GSA42D | 39.9 KVA | F4L 912 | BCI 184J | 90 | 776 |

NOTE: GENERATING SET MUST BE LOCATED WITH, AT LEAST, ONE METER FREE SPACE AROUND FOR MAINTENANCE WORK
 SURFACE OF COOLING AIR INTAKE LOUVERS MUST BE, AT LEAST, TWICE SURFACE OF COOLING AIR EXHAUST LOUVERS

NOTA: EL GENERADOR DEBE SITUARSE CON, AL MENOS, UN METRO LIBRE ALREDEDOR PARA TRABAJOS DE MANTENIMIENTO
 LA SUPERFICIE DE REJILLA DE REFRIGERACION DE ENTRADA DEBE SER, AL MENOS, DOS VECES LA SUPERFICIE DE LA REJILLA DE SALIDA DE AIRE

| MODEL/ MODELO | AIR FLOW/CAUDALES DE AIRE (M3/H) | | | FUEL CONSUMPTION/ CONSUMO DE COMBUSTIBLE (L/H) | | RECOMMENDED AIR FLOW FOR COMBUSTION AND COOLING/ FLUJO DE AIRE RECOMENDADO PARA COMBUSTION Y REFRIGERACION (M3/H) |
|---------------|----------------------------------|-----------------------|-----------------|--|-----------|---|
| | COMBUSTION | COOLING AIR | EXHAUST GASES | 75% LOAD | 100% LOAD | |
| | COMBUSTION | AIRE DE REFRIGERACION | GASES DE ESCAPE | | | |
| GSA22D | 86.4 | 1505 | 224 | 3.9 | 5.2 | 4500 |
| GSA30D | 117 | 2086 | 305 | 5.2 | 7.0 | 7000 |
| GSA42D | 144 | 2530 | 353 | 7.1 | 9.4 | 7000 |

* IF IN DOUBT-ASK, DO NOT SCALE / EN CASO DE DUDA-PREGUNTAR, NO ESCALAR
 * RECOMMENDED INSTALLATION DIMENSIONS FOR STANDARD CONFIGURATION / DIMENSIONES DE INSTALACION RECOMENDADAS PARA CONFIGURACION ESTANDAR
 * THE PRODUCER RESERVES THE RIGHT OF MODIFYING THE DIMENSIONS REPRESENTED IN THIS PLANE WITHOUT PRIOR NOTICE. EL FABRICANTE SE RESERVA EL DERECHO DE MODIFICAR LAS DIMENSIONES REPRESENTADAS EN ESTE PLANO SIN PREVIO AVISO

| | | | | | |
|----------|--|-------|--|---|--|
| 2004 | DATE | NAME | | | |
| Drawn | | J J M | | | |
| Checked | | J J G | | | |
| Examined | | | | | |
| SCALE | RECOMMENDED INSTALLATION DIMENSIONS STANDARD GENSET | | |  | |
| | GSA22D-30D-42D 1.500 RPM | | | No P[GSA22D-42D]_BOO Replacing: Replaced by: | |