


POWERI – generating sets powered by BRIGGS & STRATTON VANGUARD - petrol

TYPE NO	POWERI 2801 BV	POWERI 5001 BV	POWERI 6501 BV	POWERI 8501 BV	POWERI 10M BV	POWERI 4/7503 BV	POWERI 7503 BV	POWERI 10,0 BV	POWERI 12,5 BV
Rating VA	2 800	5 000	6 500	8 500	10 000	7 500	7 500	10 000	12 500
Contin. rating W	2 500	3 900	5 800	5 800	9 500	3 900	6 000	8 000	10 000
Protection frame	yes	yes	yes	yes	yes	yes	yes	yes	yes
ENGINE	118432	185432	245432	245432	305442	185432	245432	294442	350442
Nominal hp	6	9	13	13	16	9	13	14	18
Rating hp/3000 rpm	5	7,5	10,3	10,3	12,5	7,5	10,3	12,5	16
Displacement cm ³	182	296	391	391	480	296	391	480	570
Oil guard	yes	yes	yes	yes	yes	yes	yes	yes	yes
Fueltank litres	4	6	7,1	7,1	8,5	6	7,1	8,5	8,5
Consumt. max l/h	0,6-1,3	0,7-1,8	1,2-3,2	1,2-3,2	1,6-4,6	0,7-1,8	1,2-3,2	1,6-4,4	1,6-4,6
Noise dB	66	71	76	76	87	75	79	87	87
Cooling	air	air	air	air	air	air	air	air	air
GENERATOR	S15W	S16W	S16F	S20FS	S20FS	T16F	T16F	T20FS	T20FS
Rating VA	2 800	5 000	6 500	8 500	10 000	7 500	7 500	10 000	12 500
Voltage V	230	230	230	230	230	230/400	230/400	230/400	230/400
Circuit breaker A	12	20	25	25	30+16	4 x 10	4 x 10	4 x 16	4 x 16
Resid.cur.device	-	-	-	-	-	on	on	on	on
Socket 230 V	2 kpl	2 kpl	2 kpl	2 kpl	2 kpl	2 kpl	2 kpl	2 kpl	2 kpl
Socket 400 V	-	-	-	-	-	1 kpl	1 kpl	1 kpl	1 kpl
Warranty years	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1
Dimens. l-w-h cm	64-59-45	70-50-50	70-53-50	70-53-50	82-42-59	70-50-50	70-53-50	82-42-59	82-42-59
Weight kg	42	56	75	90	105	73	81	95	105

Available also with electric start (not 2801BV).

Optionals:

- Wheelsets
- Extra fueltanks
- V-, A-, Hz- and H-meters
- Remote control
- Loadstarting
- Automatic mains failure control system
- Weather / noise protection

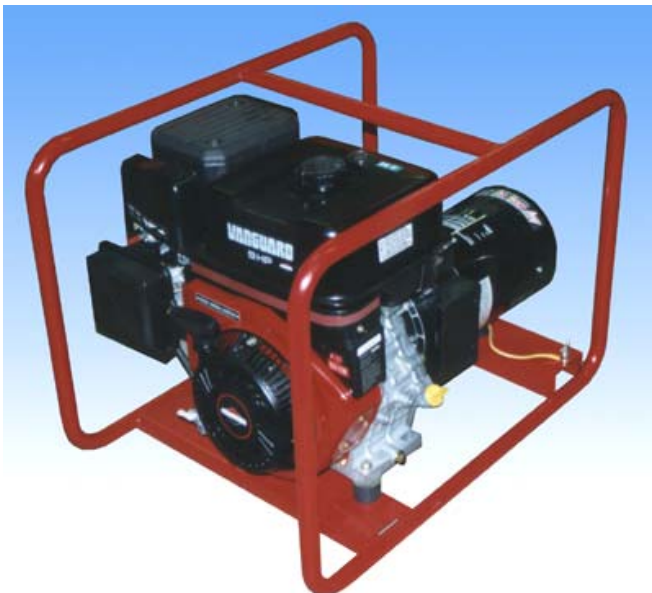

POWERI 5001 BV



POWERI 10,0 BV-S